


TYPE	YEAR	LINE SECTION	SHEET No.
PRELIM	2024		1

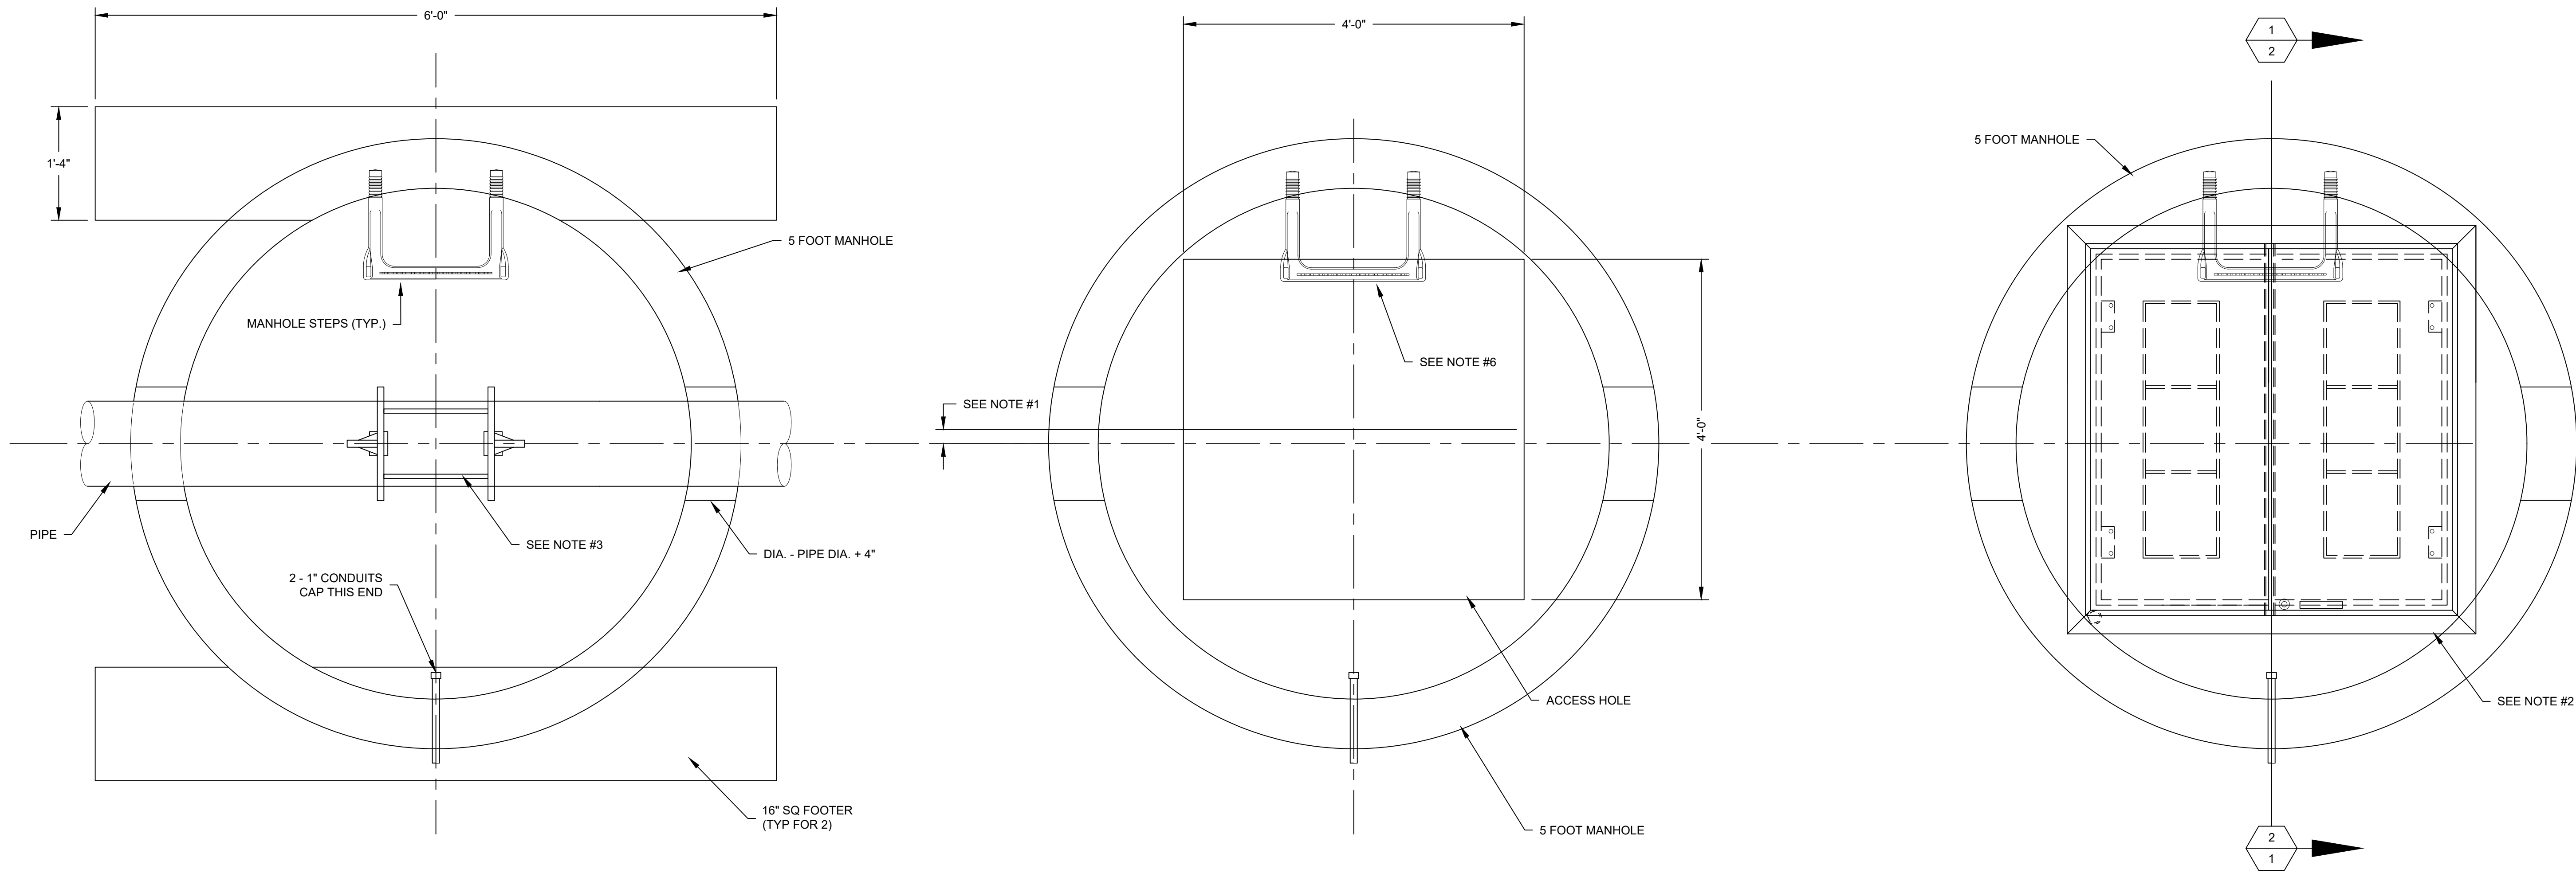

- NOTES:
1. OFFSET ACCESS HATCH CENTER TOWARDS MANHOLE STEPS.
 2. ACCESS HATCH TO BE HALLIDAY PRODUCTS W2S4242 ALUMINUM HATCH WITH RECESSED PADLOCK BOX.
 3. BADGER DYNASONIC TFX-500W ULTRASONIC FLOW TRANSMITTER.
 4. SCADA CABINET TO BE INSTALLED BY CONTRACTOR FOR TOTALIZER, ITRON UNIT, AND GFCI RECEPTACLE.
 5. MANHOLE STEPS SHALL BE WITHIN 18" OF TOP, 12" O.C.
 6. CONTRACTOR INSTALLING MUST USE PDU METER INSTALLATION TO INSTALL METER AND PROGRAM THE METER.
 7. LID FOR ASPHALT/HARD SURFACES. FLAT TOP WITH MANHOLE FRAME AND CASTING LID TO BE STAMPED WATER.

METER VAULT FOR FIRE SERVICE METER

N.T.S.





CITY OF PORTLAND
DEPARTMENT OF UTILITIES

REVISION NO: 5
DATE:10/10/2024

W-20 SHEET #1

SCADA CONTROL CABINET
(SEE NOTE #4 ON SHEET 1)

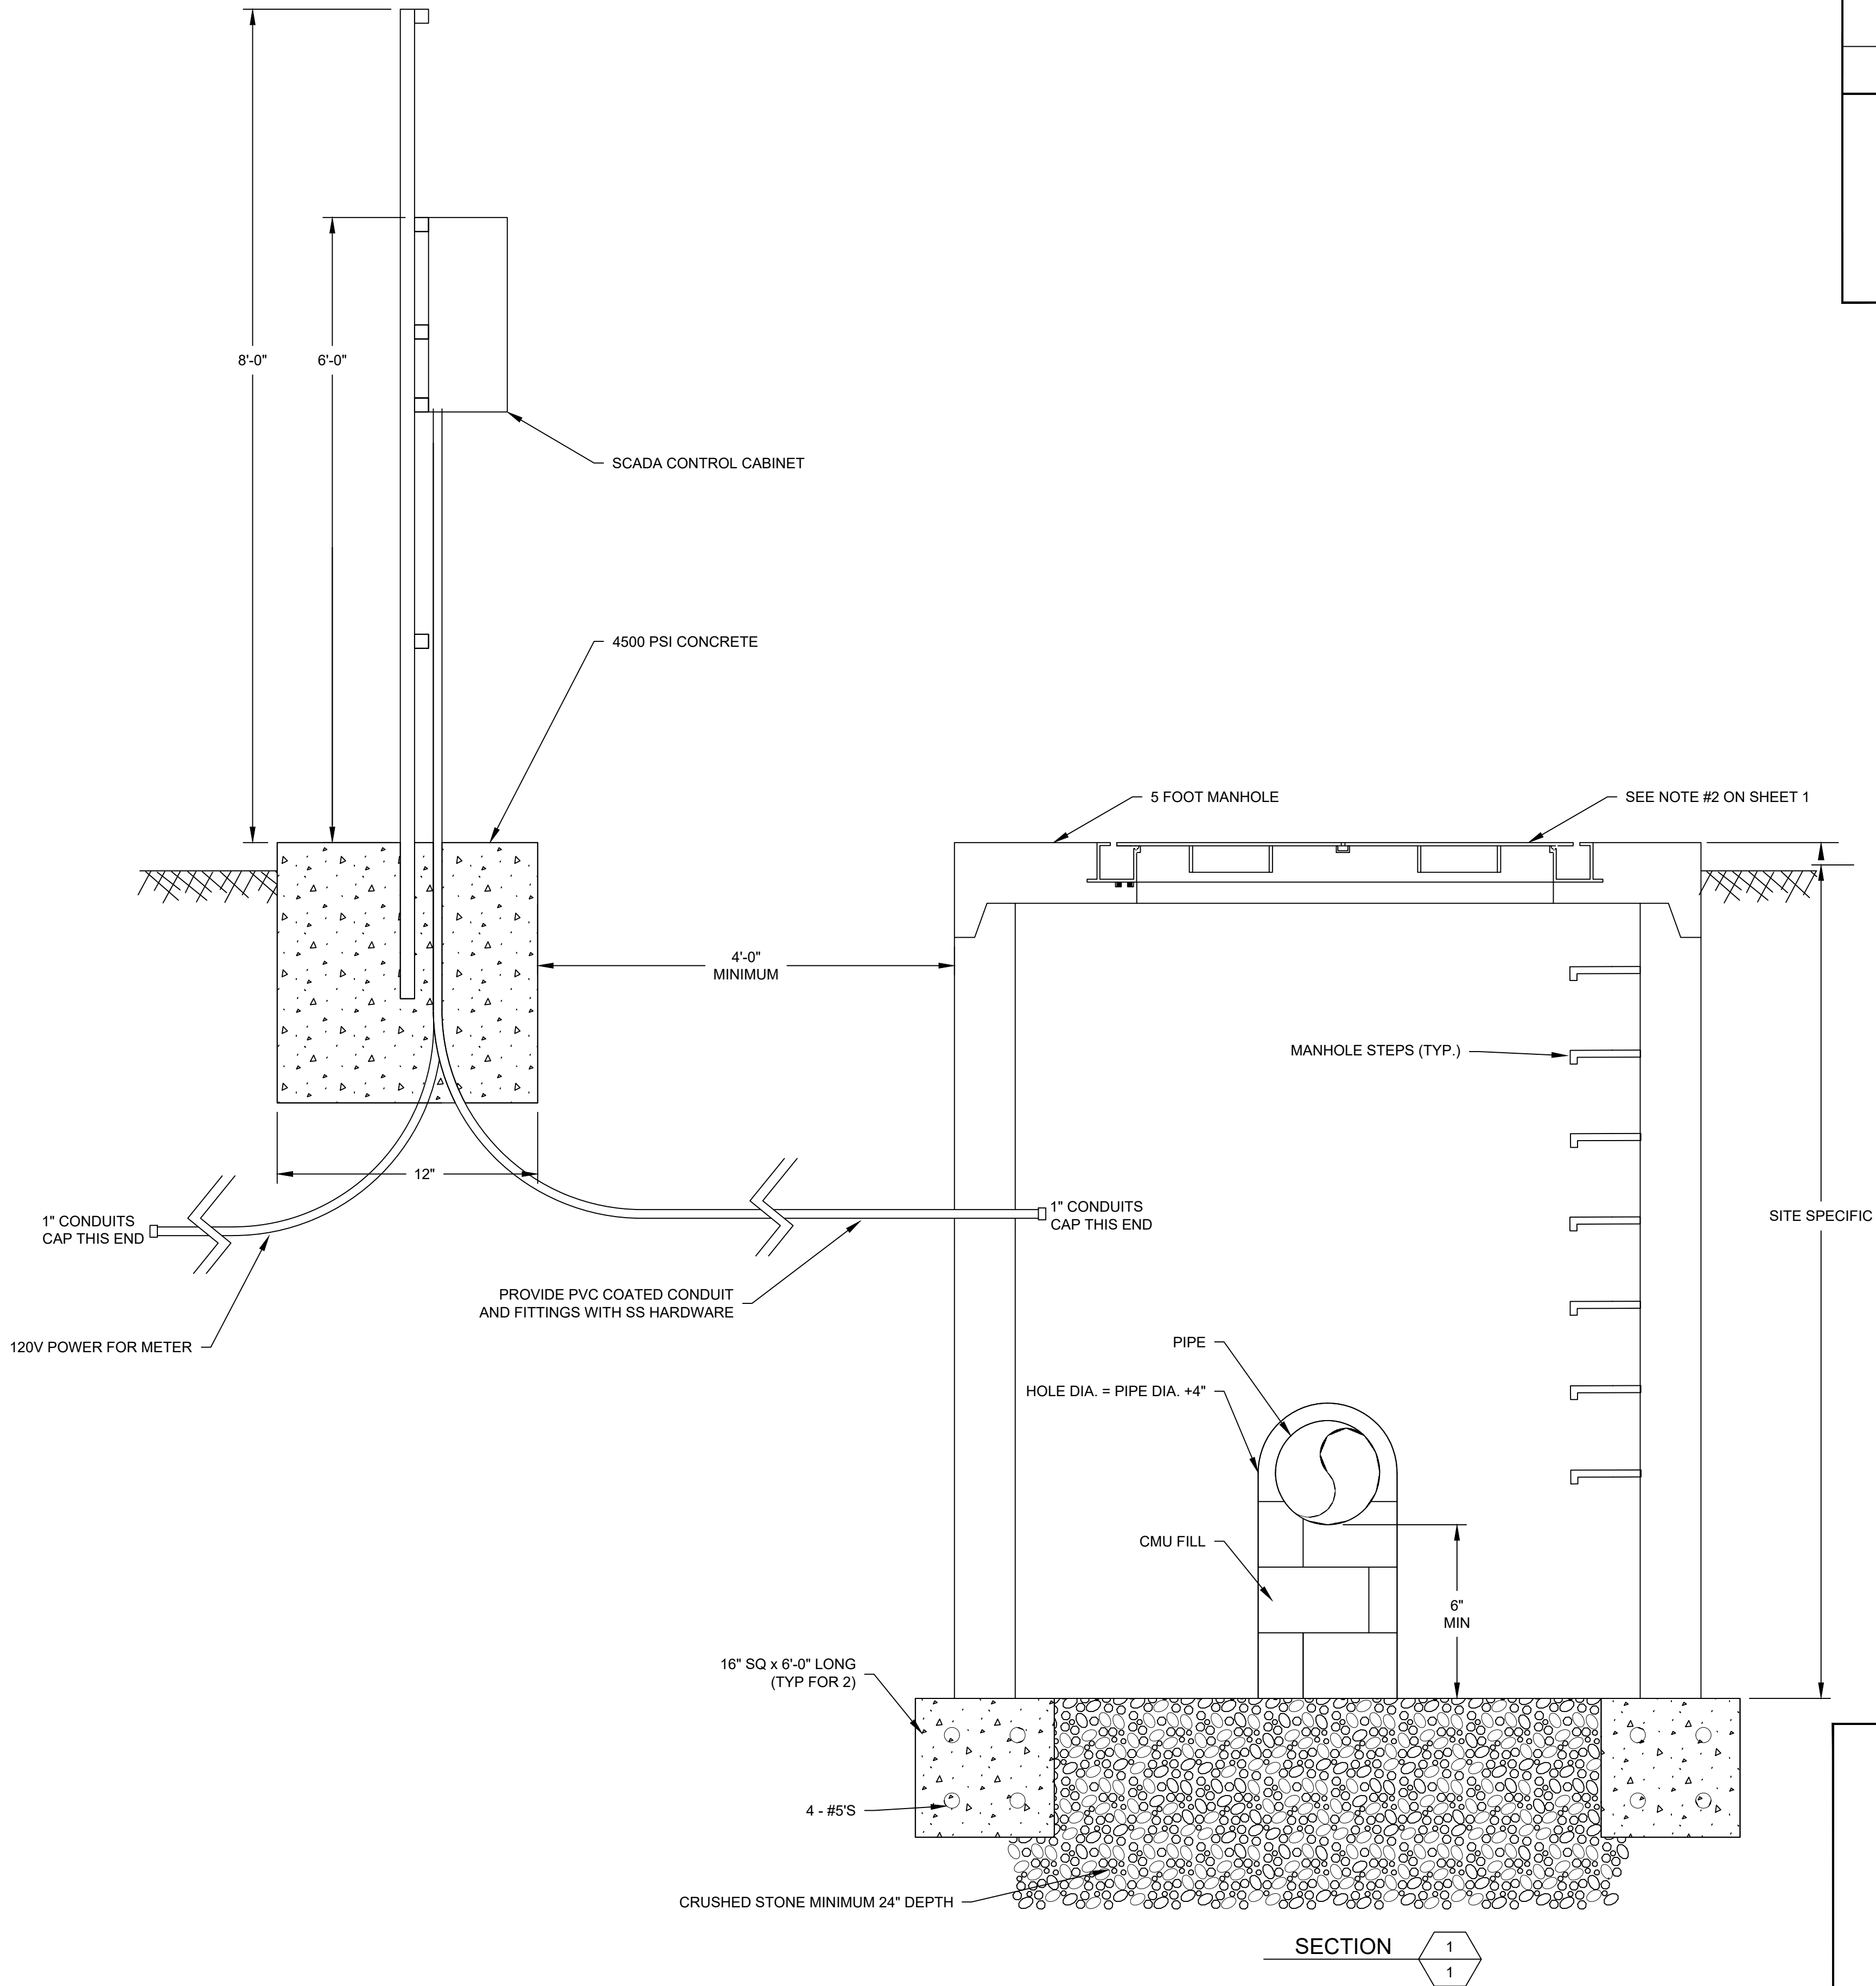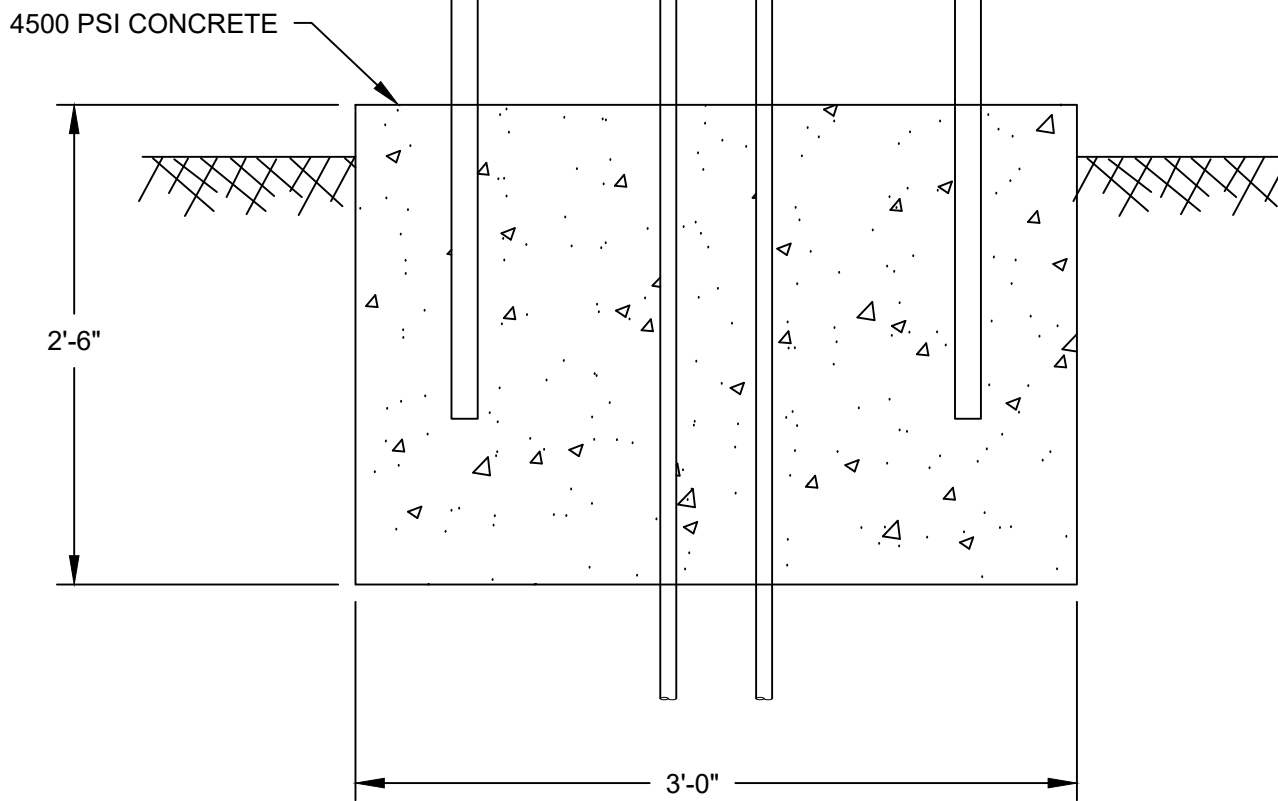

SCADA CONTROL PANEL AND
METER SUPPORT RACK FOR
FIRE SERVICE METER

N.T.S.

TYPE	YEAR	LINE SECTION	SHEET No.
PRELIM	2024		1



Call 811 Before You Dig!

PORTLAND DEPARTMENT OF UTILITIES

PDU

Portland, Tennessee

CITY OF PORTLAND
DEPARTMENT OF UTILITIES

REVISION NO: 5
DATE:10/10/2024

W-20 SHEET #2