




NOTES:

1. ALL CLEANOUT NOTES FROM WW-06 SHALL APPLY TO THE DOUBLE SEWER SERVICE CONNECTION - LONG SIDE
2. CLEANOUT SHALL BE LOCATED 1' OUTSIDE OF THE ROW (AS CLOSE AS PRACTICABLE) IN THE PUDU OR 1' FROM BACK OF SIDEWALK.
3. PLUMBER SHALL INSTALL 6" CLEANOUT AND 6" SERVICE LINE OR 6"X4" RED. W/4" SCH.40 SERVICE LINE; OWNER IS RESPONSIBLE FOR SERVICE LINE FROM CLEANOUT TO BUILDING.

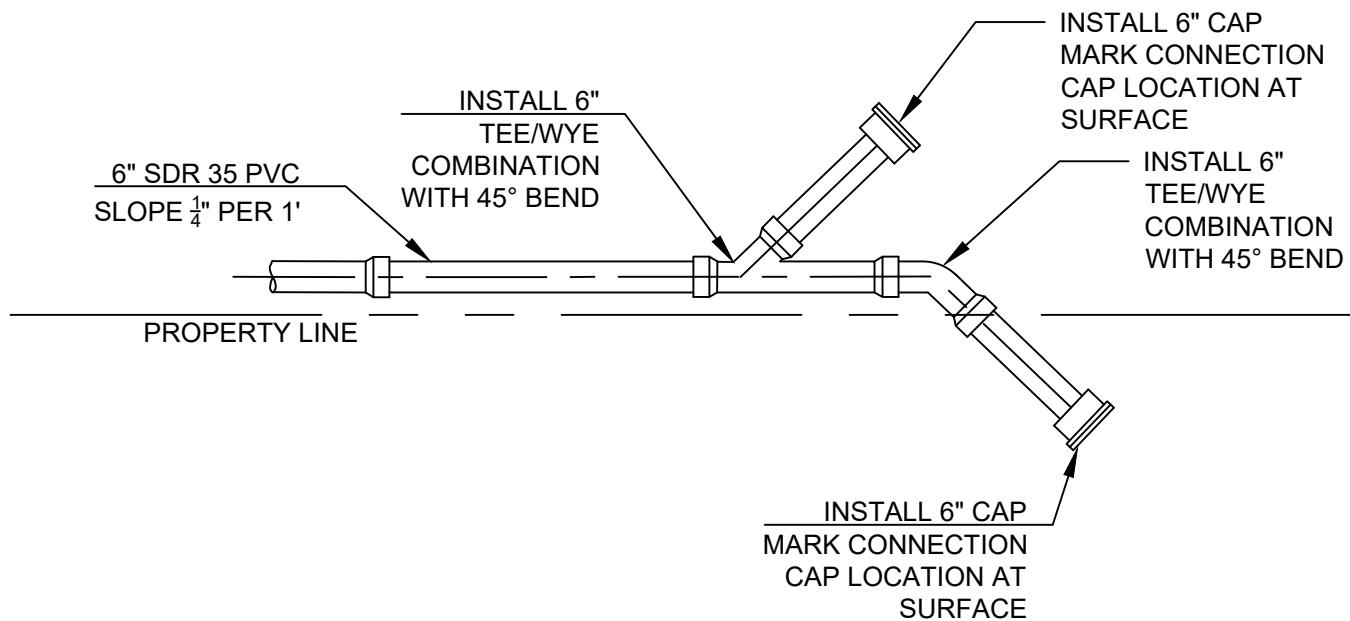

CITY OF PORTLAND
DEPARTMENT OF UTILITIES - SEWER
STANDARD SEWER DETAILS

REVISION NO: 3
DATE: 06/05/2024

WW-07

DOUBLE SEWER SERVICE CONNECTION - LONG SIDE
N.T.S.